DYROS40

Brass connectors with 9 mm passage capacity* for water, grease, air, oil etc.

developed specifically for coolants in plastic tools


Today Dyros 40 can be found everywhere: In short, Dyros can be found wherever

- on plastic moulds
- on compressed-air plants
- on oxygen and gas cylinders
- in operating rooms and in numerous other places


In short, Dyros can be found wherever small dimensions, reliability and safety are a must.

All connectors have built-in valves that are perfectly tight even at very low pressure.

A locking device is automatically released upon engagement, so that the connector can be operated by one hand.

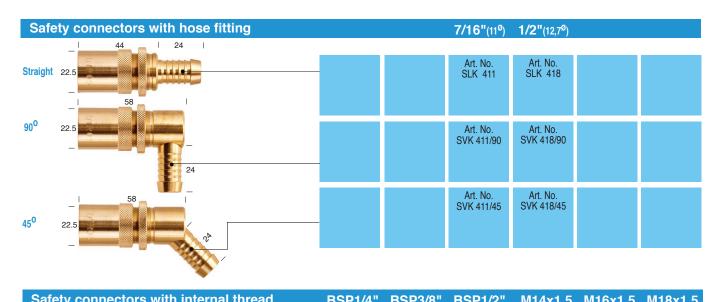

Salety Connectors with internal timeau	DSP 1/4	D3P3/0	D3P 1/2	W114X1.5	C.IXOIIVI	C.IXOIIVI
Straight 22.5	Art. No. SLKR 414 (HEX = 21)	Art. No. SLKR 438 (HEX = 21)	Art. No. SLKR 412 (HEX = 24)	Art. No. SLKM 445 (HEX = 21)	Art. No. SLKM 465 (HEX = 21)	Art. No. SLKM 485 (HEX = 21)
Safety connectors with external thread	BSP1/4"	BSP3/8"	BSP1/2"	M14x1.5	M16x1.5	M18x1.5
	Art. No. SLKUR 414	Art. No. SLKUR 438	Art. No. SLKUR 412	Art. No. SLKUM 445	Art. No. SLKUM 465	Art. No. SLKUM 485
Straight 22.5	(HEX = 21)					
90° 22.5	Art. No. SVKUR 414/90	Art. No. SVKUR 438/90		Art. No. SVKUM 445/90	Art. No. SVKUM 465/90	Art. No. SVKUM 485/90
45 ⁰ 22.5	Art. No. SVKUR 414/45	Art. No. SVKUR 438/45		Art. No. SVKUM 445/45	Art. No. SVKUM 465/45	Art. No. SVKUM 485/45



Dyros products are unimpeachable quality - down to the smallest detail

The Thread BSP corresponds to G1/4" - G3/8" - G1/2"

The connectors on these pages are also made without valve (OV).

Order e.g. with valve no. SLK 418 Without valve order no. SLK 418OV.

All connectors can also be delivered with coloured red and blue caps.

Order e.g. valve no. SLK 418R = red cap



