

## **Brass connectors with** 9 mm passage capacity\* for water, grease, air, oil etc. .....

## developed specifically for coolants in plastic tools


Today Dyros 90 can be found everywhere: In short, Dyros can be found wherever on plastic moulds
on compressed-air plants

- on oxygen and gas cylinders
- in operating rooms
- and in numerous other places

small dimensions, reliability and safety are a must. All connectors have built-in valves that

are perfectly tight even at very low pressure.

A locking device is automatically released upon engagement, so that the connector can be operated by one hand.

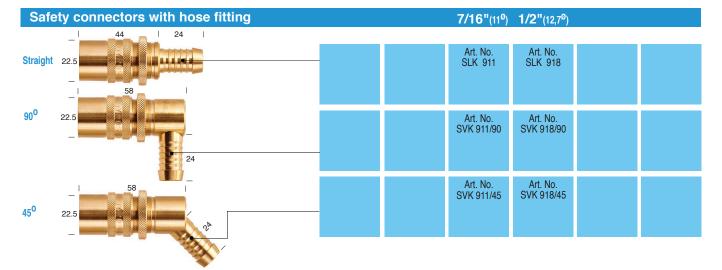

Safety connectors with internal thread	BSP1/4"	BSP3/8"	BSP1/2"	M14x1.5	M16x1.5	M18x1.5
	Art. No. SLKR 914	Art. No. SLKR 938	Art. No. SLKR 912	Art. No. SLKM 945	Art. No. SLKM 965	Art. No. SLKM 985
Straight 22.5	(HEX = 21)	(HEX = 21)	(HEX = 24)	(HEX = 21)	(HEX = 21)	(HEX = 21)
Safety connectors with external thread	BSP1/4"	BSP3/8"	BSP1/2"	M14x1.5	M16x1.5	M18x1.5
	Art. No. SLKUR 914	Art. No. SLKUR 938	Art. No. SLKUR 912	Art. No. SLKUM 945	Art. No. SLKUM 965	Art. No. SLKUM 985
Straight 22.5	(HEX = 21)	(HEX = 21)	(HEX = 21)	(HEX = 21)	(HEX = 21)	(HEX = 21)
90 <sup>0</sup> 22.5	Art. No. SVKUR 914/90	Art. No. SVKUR 938/90		Art. No. SVKUM 945/90	Art. No. SVKUM 965/90	Art. No. SVKUM 985/90
45 <sup>0</sup> 22.5	Art. No. SVKUR 914/45	Art. No. SVKUR 938/45		Art. No. SVKUM 945/45	Art. No. SVKUM 965/45	Art. No. SVKUM 985/45

Safety adaptor connector with nipple fitting	serie:	6	30	40	80
Straight 22.5		Art. No. SLK 900/600	Art. No. SLK 900/300	Art. No. SLK 900/400	Art. No. SLK 900/800

## Dyros products are unimpeachable quality - down to the smallest detail

The Thread BSP corresponds to G1/4" - G3/8" - G1/2"

The connectors on these pages are also made without valve (OV).

Order e.g. with valve no. SLK 918 Without valve order no. SLK 918OV All connectors can also be delivered with coloured red and blue caps.

Order e.g. valve no. SLK 918R = red cap

